


TBLE-01S

TAMIYA BRUSHLESS
ELECTRONIC SPEED
CONTROLLER 01
(SENSORED)

FORWARD/REVERSE
TYPE

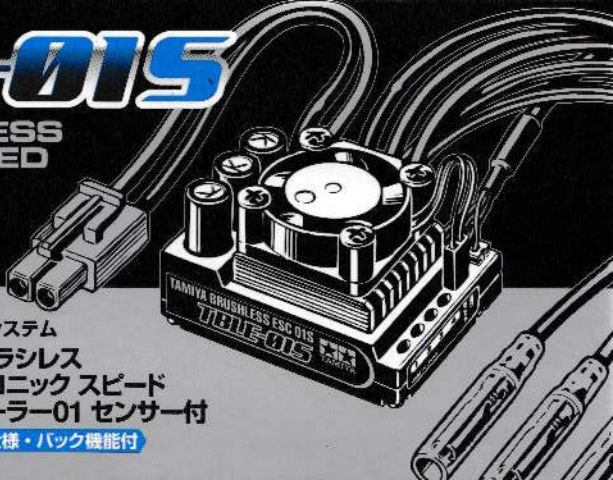

TAMIYA

タミヤRCシステム
タミヤ ブラシレス
エレクトロニック スピード
コントローラー-01 センサー付

センサー付仕様・バック機能付

《About the TBLE-01S》This ESC is especially designed for use with the TBLM-01S series of Tamiya Brushless Motors (Sensored). In addition to 5 preset profiles, settings such as brake, neutral brake, and deadband can be adjusted separately. It also features 3 protection systems including overheating, overloading, and low voltage.

Compatible Receiver	TAMIYA, KO, FUTABA, JR, SANWA	Max. Continuous Current	100A	Weight	90g (including wires)
Functions	Forward / Reverse / Brake ※Reverse function can be cancelled.	Receiver Voltage	5V	Protection System	Overheat Overload Low voltage
Compatible Motors	Tamiya TBLM-01S Series ※Use with sensored brushless motors only.	Receiver Current	3A		
Input Voltage	6.6~7.2V	Drive Frequency	16KHz		
		Dimensions	47×35.5×31mm		

《TBLE-01S》タミヤブラシレスモーター・センサー付き（TBLM-01Sシリーズ）専用のESC（スピードコントローラー）です。5種類のプリセットプロフィールに加えて、ブレーキ出力設定、ニュートラルブレーキ出力設定、デッドバンド設定などを個別にセットアップ可能。高性能はもちろん、温度、過電流、低電圧の3タイプの保護機能も搭載しました。

使用可能 プロポメーカー	タミヤ・KO・フタバ・JR・サンワ製	連続最大電流	100A	重量	90g(コード類含む)		
動作	前進 後進 ブレーキ ※バックキャンセル可能	受信機用電源	5V			保護機能	温度保護 過電流保護 低電圧保護
対応モーター	TBLM-01S シリーズ ※センサー付に限る	受信機用電流	3A				
使用電源電圧	6.6~7.2V	ドライブ周波数	16KHz				
		サイズ	47×35.5×31mm				