

SPRAY-WORK

COMPACT AIR COMPRESSOR TAMIYA AIRBRUSH SYSTEM




COMPATIBLE AIRBRUSHES

This air compressor can be used with Tamiya HG airbrushes.

※Tamiya Badger airbrushes and airbrushes included in Tamiya Spray-Work Basic Compressor Sets cannot be used due to different connector sizes.

※Use of Tamiya Airbrush Stand (sold separately) is recommended.

※It may be difficult to achieve fine finishes on large areas.

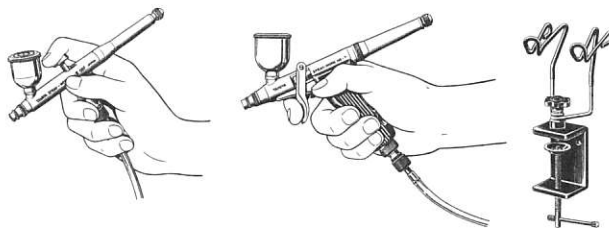

HOW TO USE

Connecting Airbrush


Attach the plastic connector to the compressor, then attach air stop valve to airbrush. Completely tighten airbrush connector to airbrush to make sure there is no air leakage.

CONNECTING AC ADAPTER

Make sure the compressor is turned off when connecting DC plug to the compressor, then connect AC adapter to outlet.

AIR STOP VALVE

Use airbrush connector with air stop valve. Air stop valves are not required for trigger type airbrushes.

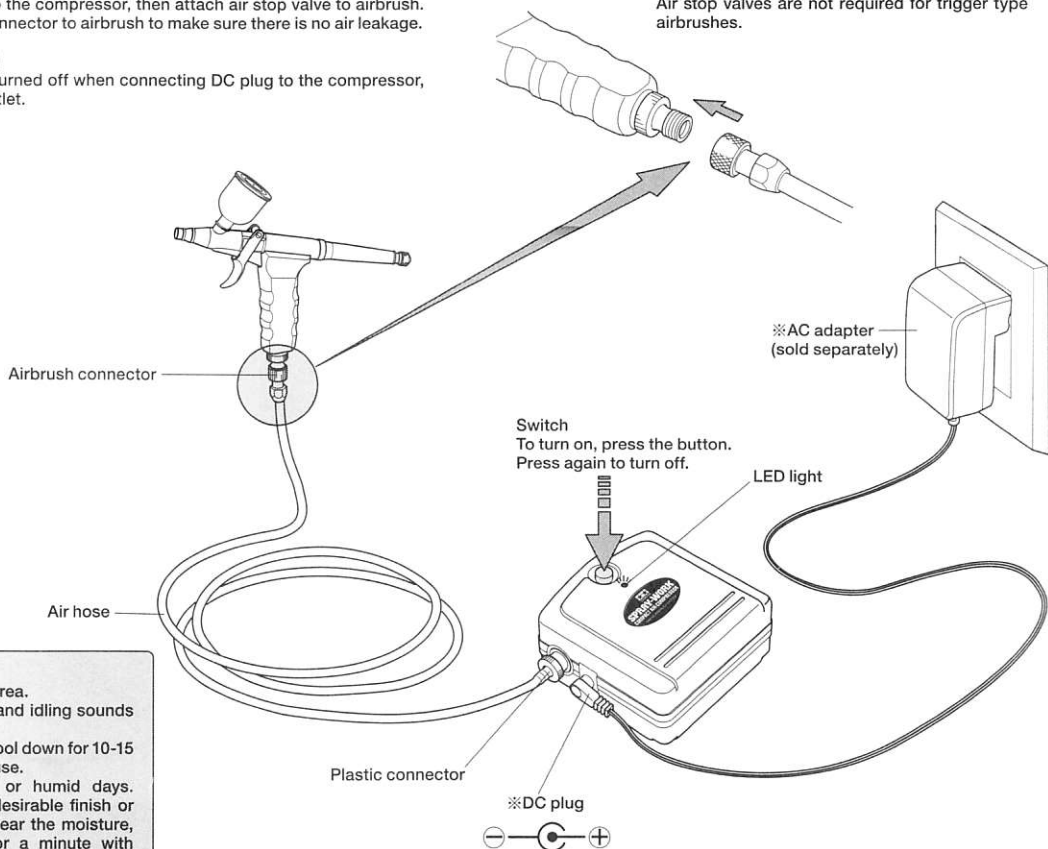

CAUTION

- Spray in a well ventilated area.
- The compressor's in-use and idling sounds are different. This is normal.
- Allow the compressor to cool down for 10-15 minutes after 30 minutes of use.
- Avoid painting on rainy or humid days. Moisture may cause an undesirable finish or collect in the air hose. To clear the moisture, turn on the compressor for a minute with airbrush detached.

※Parts with this mark are not included in this set. Use compatible 12V AC adapter.

READ BEFORE ASSEMBLY

⚠ CAUTION

- Do not use outdoors. Keep away from water, moisture and dust, as these could cause electric shock or start a fire.
- Do not touch the compressor and the power cord with wet hands.
- Do not paint with the power cord tied up.
- Do not damage the power cord.
- Do not pull, excessively bend, or place weights on the power cord.
- Do not pull the power cord from the outlet when disconnecting AC adapter.
- Do not use the compressor when the power cord is damaged. Please contact your local Tamiya dealer.
- AC adapter and DC plug must be connected securely.
- When not in use, turn off and disconnect the compressor from the power source.

- Do not use this AC adapter (sold separately) with other air compressors.
- Use for spray painting only.

⚠ NOTICE

- Before painting, carefully check the power cord, plug and On/Off switch.
- Carefully handle the plug. Improper use may cause serious injury.
- Do not use with a defective power source.
- Keep out of humidity, direct sun light, and temperatures below 0°C.
- Do not cover the compressor during or after use as it can become hot. Allow to cool down before handling.
- Avoid excess vibration or shock.
- Never paint near children or animals.
- Use protective goggles and a mask when painting.

- Contact your local Tamiya dealer for any questions regarding this compressor including parts replacement or repairs.

Specifications

Voltage rating: DC12V

Continuous pressure: Approx.0.07Mpa

Air output: 3L/min

Current consumption: 1.6A

Volume: 55dB

Weight: Approx.0.4kg



www.tamiya.com

74533 Compact Air Compressor (11057274)

保証規定

1. 正常な使用状態（取扱説明書などの注意書にしたがった使用状態）で故障した場合には、無料で修理をいたします。
2. 保証対象はタミヤコンパクトコンプレッサーとその付属品です。
3. 次のような場合は、保証期間内でも有料とさせていただきます。
 - ① 使用上の誤りや操作の間違いによると認められる故障（電源の逆接続、水濡れ、衝突などによる故障や損傷）
 - ② 機械的、電気的な変更や改造、分解した場合
 - ③ 指定以外の電源を使用した場合。
 - ④ お買い上げ後の輸送や移動時の落下などによる故障や損傷。
 - ⑤ 保管上の不備（高温、多湿、ナフタリンその他の薬品など、製品に損傷を与える場所での保管）や手入れの不備による故障や損傷。
 - ⑥ 火災や地震、その他災害による場合。
 - ⑦ 修理の際に保証書が添えられていない場合。

- ⑧ 保証書にお買い上げ店印、お買い上げ年月日のない場合やそれらの字句を書き換えた場合。
4. 修理依頼の際の送料は、お客様にご負担をお願いいたします。
5. この保証書は日本国内においてのみ有効です。
6. この保証書は再発行しませんので大切に保管してください。
 - ※修理を依頼される場合はこの保証書を添えて、お買い上げ店または株式会社タミヤ カスタマーサービスにお送りください。
 - ※故障修理を依頼される場合は、その故障状況をできるだけ詳しくお教えください。修理個所を早く確実に知ることができ、修理期間が短くなります。

〒422-8610 静岡県駿河区恩田原3-7
(株)タミヤ カスタマーサービス
お問い合わせ電話番号 054-283-0003

Effective only in Japan.