



THE PROCESS OF FREQUENCY BIND FOR 2.4GHz R/C SYSTEM



1. Press the switch for frequency bind, then turn on the transmitter's power.

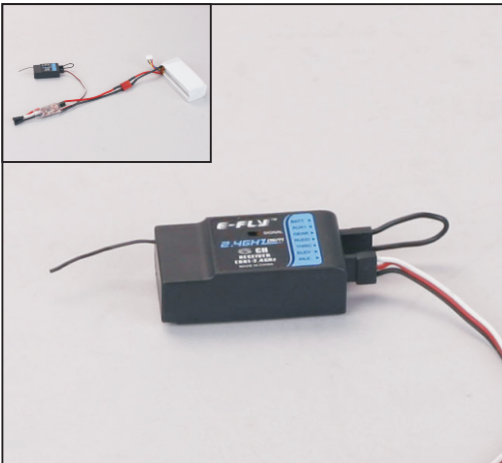

3. If the frequency bind is successful, the indicator light will extinguish.

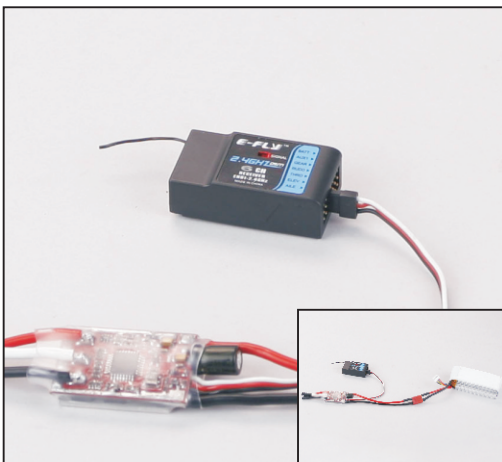

5. The indicator light turns bright again seconds after pulling out the short-circuit plug, which means that the radio system can work normally now.



2. Connect the ESC to receiver for electricity supply, which results to the indicator light glitter. And then plug the short-circuit plug into the Receiver in the position of BATT.




4. Press frequency bind switch again to get it rebound. The transmitter get into working mode.


C型 24GHz 遥控器设备对频过程




1. 按下发射机的对频开关, 打开电源.

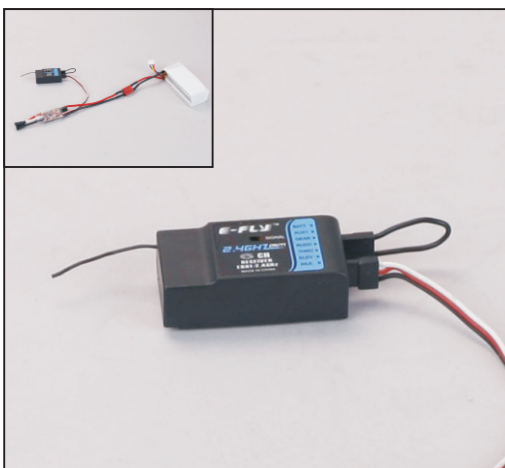

3. 接收机显示灯灭, 表示对频成功.

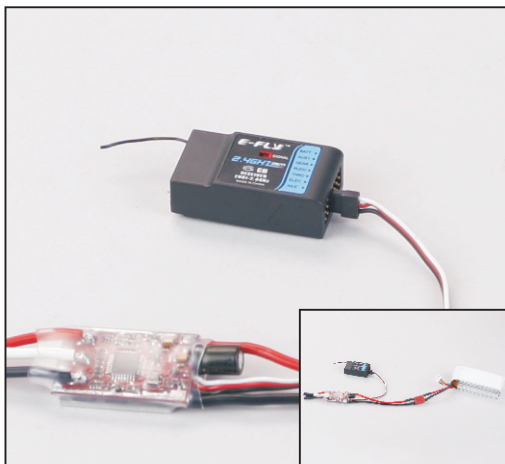

5. 拔下接收机的短路插, 数秒后接收机显示灯常亮, 表示设备可以正常工作.

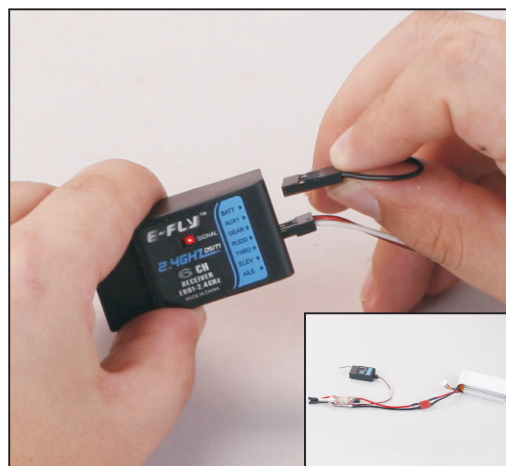

2. 给接收机供电, 接收机显示灯开始闪烁, 在BATT处插上短路插(如图所示).



4. 弹起发射机的对频开关, 发射机进入工作模式.